

TCL SOLAR

E Class Solar Panel

Product: HSM-BD54-DA

440-470 W | Up to 23.5% efficient



Ideal for residential
applications



Framed
glass-glass



Back contact
technology



Bifacial energy
generation

High energy yield

- Consistent energy production across all weather conditions
- Bifacial energy generation
- Low temperature coefficient

Elegant design

- Sleek panel aesthetic
- High-durability frame and heat-strengthened glass

Reliable operation

- Rigorous supply chain qualification procedures
- Easy to install
- Backed by a bankable company

Comprehensive warranty coverage

Product and power coverage	25-30 Years
Year 1 minimum warranted output	99.0%
Maximum annual degradation	0.35%

TCL SOLAR

Learn more about TCL Solar panels
www.tclsolar.com/resources



E CLASS POWER: 440-470 W | EFFICIENCY: Up to 23.5%

Electrical Data, Front STC Characteristics ¹							
	HSM-BD54- DA470	HSM-BD54- DA465	HSM-BD54- DA460	HSM-BD54- DA455	HSM-BD54- DA450	HSM-BD54- DA445	HSM-BD54- DA440
Nominal Power (Pnom) ²	470 W	465 W	460 W	455 W	450 W	445 W	440 W
Power Binning	+3/0%	3/0%	3/0%	3/0%	3/0%	3/0%	3/0%
Panel Efficiency	23.5%	23.3%	23.1%	22.8%	22.6%	22.3%	22.1%
Rated Voltage (Vmpp)	34.74 V	34.68 V	34.62 V	34.56 V	34.50 V	34.44 V	34.38 V
Rated Current (Impp)	13.54 A	13.41 A	13.29 A	13.17 A	13.05 A	12.93 A	12.80 A
Open-Circuit Voltage (Voc) ²	41.18 V	41.12 V	41.06 V	41.00 V	40.94 V	40.88 V	40.82 V
Short-Circuit Current (Isc) ²	14.32 A	14.29 A	14.25 A	14.22 A	14.12 A	14.02 A	13.92 A


BNPI Data ³							
Nominal Power (Pmax) ²	490 W	485 W	480 W	475 W	470 W	465 W	460 W
Open-Circuit Voltage (Voc) ²	41.18 V	41.12 V	41.06 V	41.00 V	40.94 V	40.88 V	40.82 V
Short-Circuit Current (Isc) ²	15.13 A	15.03 A	14.93 A	14.83 A	14.73 A	14.63 A	14.53 A

Bifacial Gain ⁴							
Pmax with 5% Bifacial Gain	494 W	488 W	483 W	478 W	473 W	467 W	462 W
Isc with 5% Bifacial Gain	15.04 A	15.00 A	14.96 A	14.93 A	14.83 A	14.72 A	14.62 A
Pmax with 10% Bifacial Gain	517 W	512 W	506 W	501 W	495 W	490 W	484 W
Isc with 10% Bifacial Gain	15.75 A	15.72 A	15.68 A	15.64 A	15.53 A	15.42 A	15.31 A

Electrical Data		Mechanical Data	
Bifaciality ($\phi P_{max}/\phi I_{sc}$)	75% +/-5%	Solar Cells	N-Type Back Contact
Bifaciality (ϕV_{oc})	98% +/-2%	Glass	2.0 mm + 2.0 mm, high transmission heat strengthened glass, AR coating on front glass
Maximum System Voltage	1500 V IEC	Junction Box	IP-68, 3 bypass diodes
Testing Temperature	-40°C to +85°C	Connector	Stäubli MC4-EVO2A
Operation Temperature	-40°C to +70°C (IEC TS 63126)	Weight	24.2 kg
Maximum Series Fuse	25 A	Max. Load ⁵	Wind: 2400 Pa, 245 kg/m ² front & back Snow: 5400 Pa, 550 kg/m ² front
Power Temp. Coef.	-0.26% / °C	Impact Resistance	25 mm diameter hail at 23 m/s
Voltage Temp. Coef.	-0.22% / °C	Frame	Black Anodized Aluminum Alloy
Current Temp. Coef.	0.05% / °C		

Packaging Configuration	
Number of modules per pallet	37
Number of pallets per 40ft HQ container	26
Number of modules per container	962

Tests And Certifications	
Standard Tests	IEC 61215, IEC 61730
Fire Rating	Class A (IEC 61730-2 / UL 790)
Protection Class	Class II (IEC 61140)
Quality Certs	ISO 9001:2015, ISO 14001:2015
EHS Compliance	ISO 45001-2018, ISO 50001:2018, Recycling Scheme

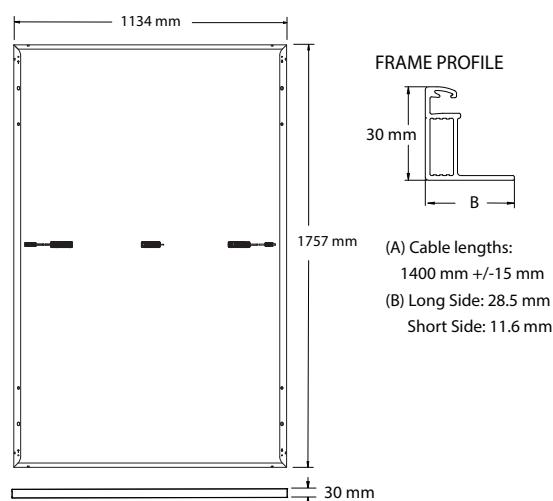

1 Standard Test Conditions (1000 W/m² irradiance, AM 1.5, 25° C). NREL calibration Standard: SOMS current, LACCS FF and Voltage.

2 Measurements tolerance +/-3%.

3 BNPI Test Condition (front 1000 W/m², rear 135W/m² irradiance, AM 1.5, 25° C).

4 The additional gain from the back side of the panel compared to the power of the front side of the panel at the standard test conditions. It depends on mounting (structure, height, tilt angle etc.) and albedo of the underlying surface.

5 Test load as per IEC 61215-2 is equal to design load with safety factor = 1.5. See "Safety and Installation Instructions" for details.

Specifications included in this datasheet are subject to change without notice.
©2025 TCL SunPower Global. All Rights Reserved.

TCL SOLAR



Please read the safety and installation instructions.
Visit www.tclsolar.com/resources.
Paper version can be requested through
techsupport.EN@sunpowerglobal.com