



E Class Solar Panel

Product: HSM-BD66-GR

640-665 W | Up to 24.6%
efficient

 Ideal for power plant applications

 Framed glass-glass

 Back contact technology

 Bifacial energy generation

High energy yield

- Consistent energy production across all weather conditions
- Bifacial energy generation
- Low temperature coefficient

Elegant design

- Sleek panel aesthetic
- High-durability frame and heat-strengthened glass

Reliable operation


- Rigorous supply chain qualification procedures
- Easy to install
- Backed by a bankable company

Comprehensive warranty coverage

Product and power coverage	15-30 Years
Year 1 minimum warranted output	99.0%
Maximum annual degradation	0.35%



Learn more about TCL Solar panels
www.sunpowerglobal.com

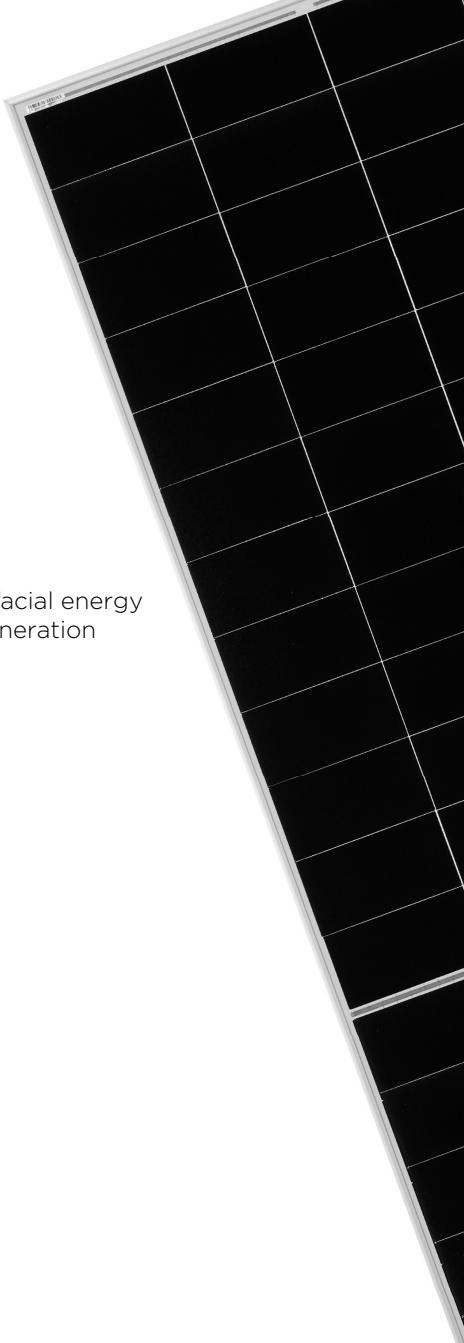

E CLASS POWER: 640-665 W | EFFICIENCY: Up to 24.6%

Electrical Data, Front STC Characteristics ¹					
	HSM-BD66-GR665	HSM-BD66-GR660	HSM-BD66-GR655	HSM-BD66-GR650	HSM-BD66-GR645
Nominal Power (Pnom) ²	665 W	660 W	655 W	650 W	645 W
Power Binning	+3/0%	+3/0%	+3/0%	+3/0%	+3/0%
Panel Efficiency	24.6%	24.4%	24.2%	24.0%	23.8%
Rated Voltage (Vmpp)	41.28 V	41.18 V	41.08 V	40.98 V	40.88 V
Rated Current (Impp)	16.11 A	16.03 A	15.94 A	15.86 A	15.78 A
Open-Circuit Voltage (Voc) ²	50.02 V	49.92 V	49.82 V	49.72 V	49.62 V
Short-Circuit Current (Isc) ²	16.78 A	16.70 A	16.62 A	16.54 A	16.46 A


BNPI Data ³					
Nominal Power (Pmax) ²	720 W	715 W	710 W	705 W	700 W
Open-Circuit Voltage (Voc) ²	50.02 V	49.92 V	49.82 V	49.72 V	49.62 V
Short-Circuit Current (Isc) ²	18.26 A	18.17 A	18.08 A	18.00 A	17.91 A

Bifacial Gain ⁴					
Pmax with 5% Bifacial Gain	698 W	693 W	688 W	683 W	677 W
Isc with 5% Bifacial Gain	17.62 A	17.54 A	17.45 A	17.37 A	17.28 A
Pmax with 10% Bifacial Gain	732 W	726 W	721 W	715 W	710 W
Isc with 10% Bifacial Gain	18.46 A	18.37 A	18.28 A	18.19 A	18.11 A

Electrical Data			Mechanical Data		
Bifaciality ($\phi P_{max}/\phi I_{sc}$)	75% +/-5%		Solar Cells	N-Type Back Contact	
Bifaciality (ϕV_{oc})	98% +/-2%		Glass	2.0 mm + 2.0 mm, semi-tempered glass, AR coating on front glass	
Maximum System Voltage	1500 V IEC		Junction Box	IP-68, 3 bypass diodes	
Testing Temperature	-40°C to +85°C		Connector	Stäubli MC4-EVO2A	
Operation Temperature	-40°C to +70°C (IEC TS 63126)		Weight	33.5 kg	
Maximum Series Fuse	30 A		Max. Load ⁵	Wind: 2400 Pa, 245 kg/m ² front & back Snow: 5400 Pa, 550 kg/m ² front	
Power Temp. Coef.	-0.26% / °C		Impact Resistance	25 mm diameter hail at 23 m/s	
Voltage Temp. Coef.	-0.20% / °C		Frame	Silver Anodized Aluminum Alloy	
Current Temp. Coef.	0.05% / °C				

Packaging Configuration		
Number of modules per pallet	36	
Number of pallets per 40ft HQ container	20	
Number of modules per container	720	

Tests And Certifications		
Standard Tests	IEC 61215, IEC 61730	
Fire Rating	Class C (IEC 61730-2 / UL 790)	
Protection Class	Class II (IEC 61140)	
Quality Certs	ISO 9001:2015, ISO 14001:2015	
EHS Compliance	ISO 45001-2018, ISO 50001:2018, Recycling Scheme	

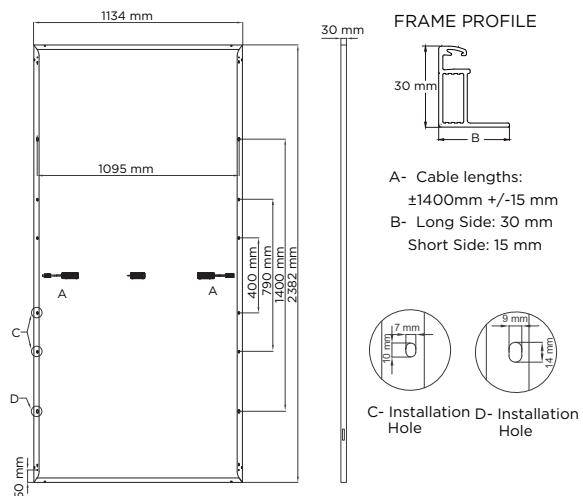

Please read the safety and installation instructions. Visit www.sunpowerglobal.com/PVInstallGuide.
Paper version can be requested through techsupport.ROW@sunpowerglobal.com

1 Standard Test Conditions (1000 W/m² irradiance, AM 1.5, 25° C).
NREL calibration Standard: SOMS current, LACCS FF and Voltage.

2 Measurements tolerance +/-3%.

3 BNPI Test Condition (front 1000 W/m², rear 135 W/m² irradiance, AM 1.5, 25° C).

4 The additional gain from the back side of the panel compared to the power of the front side of the panel at the standard test conditions. It depends on mounting (structure, height, tilt angle etc.) and albedo of the underlying surface.

5 Test load as per IEC 61215-2 is equal to design load with safety factor = 1.5. See "Safety and Installation Instructions" for details.

Specifications included in this datasheet are subject to change without notice. ©2026 TCL SunPower Global. All Rights Reserved.

TCL SOLAR

Publication Date: Jan. 2026